

HOSTAFORM® C 13031

Injection molding grade with moderate flow; about 10% higher strength; rigidity and hardness than C 13021
 Chemical abbreviation according to ISO 1043-1: POM Molding compound ISO 29988- POM-K, M-GNR, 04-002 POM copolymer Easy flowing Injection molding type like C 13021, but with higher strength, rigidity and hardness over the entire permissible temperature range for HOSTAFORM; good chemical resistance to solvents, fuel and strong alkalis as well as good hydrolysis resistance; high resistance to thermal and oxidative degradation. Monomers and additives are listed in EU-Regulation (EU) 10/2011 FDA compliant according to 21 CFR 177.2470 UL-registration for all colours and a thickness more than 1.5 mm as UL 94 HB; burning rate ISO 3795 and FMVSS 302 < 75 mm/min for a thickness more than 1 mm. Ranges of applications: For molded parts with higher requirements to strength, rigidity und hardness, ranges of applications with fuel contact. FDA = Food and Drug Administration (USA) UL = Underwriters Laboratories (USA) FMVSS = Federal Motor Vehicle Safety Standard (USA)

Product information

Part Marking Code	POM	ISO 11469
-------------------	-----	-----------

Rheological properties

Melt volume-flow rate	12 cm ³ /10min	ISO 1133
Temperature	190 °C	
Load	2.16 kg	
Moulding shrinkage, parallel	2.0 %	ISO 294-4, 2577
Moulding shrinkage, normal	1.8 %	ISO 294-4, 2577

Typical mechanical properties

Tensile Modulus	3050 MPa	ISO 527-1/-2
Yield stress, 50mm/min	68 MPa	ISO 527-1/-2
Yield strain, 50mm/min	8 %	ISO 527-1/-2
Nominal strain at break	28 %	ISO 527-1/-2
Flexural Modulus	3000 MPa	ISO 178
Flexural Stress at 3.5%	78 MPa	ISO 178
Compressive stress at 1% strain	31 MPa	ISO 604
Shear Modulus	1120 MPa	ISO 6721
Tensile creep modulus, 1h	2750 MPa	ISO 899-1
Tensile creep modulus, 1000h	1450 MPa	ISO 899-1
Charpy impact strength, 23°C	200 kJ/m ²	ISO 179/1eU
Charpy impact strength, -30°C	200 kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6.7 kJ/m ²	ISO 179/1eA
Charpy notched impact strength, -30°C	6 kJ/m ²	ISO 179/1eA
Ball indentation hardness, H 358/30	156 MPa	ISO 2039-1
Poisson's ratio	0.428	

HOSTAFORM® C 13031

Thermal properties

Melting temperature, 10 °C/min	170 °C	ISO 11357-1/-3
Temp. of deflection under load, 1.8 MPa	107 °C	ISO 75-1/-2
Temp. of deflection under load, 0.45 MPa	161 °C	ISO 75-1/-2
Vicat softening temperature, 50 °C/h, 50N	158 °C	ISO 306
Coeff. of linear therm. expansion, parallel	110 E-6/K	ISO 11359-1/-2
Thermal conductivity of melt	0.155 W/(m K)	Internal

Flammability

Burning Behav. at 1.5mm nom. thickn.	HB class	UL 94
Thickness tested	1.5 mm	UL 94
Burning Behav. at thickness h	HB class	UL 94
Thickness tested	3.00 mm	UL 94
UL recognition	yes	UL 94

Electrical properties

Relative permittivity, 100Hz	4	IEC 62631-2-1
Relative permittivity, 1MHz	4	IEC 62631-2-1
Dissipation factor, 100Hz	20 E-4	IEC 62631-2-1
Dissipation factor, 1MHz	50 E-4	IEC 62631-2-1
Volume resistivity	1E12 Ohm.m	IEC 62631-3-1
Surface resistivity	1E14 Ohm	IEC 62631-3-2
Electric strength	35 kV/mm	IEC 60243-1
Comparative tracking index	PLC 0 PLC	UL 746A

Other properties

Humidity absorption, 2mm	0.2 %	Sim. to ISO 62
Water absorption, 2mm	0.65 %	Sim. to ISO 62
Density	1410 kg/m ³	ISO 1183

Injection

Drying Temperature	100 - 120 °C	
Drying Time, Dehumidified Dryer	3 - 4 h	
Processing Moisture Content	0.15 %	
Melt Temperature Optimum	205 °C	Internal
Screw tangential speed	0.2 - 0.21 m/s	
Max. mould temperature	80 - 120 °C	
Back pressure	4 MPa	
Injection speed	slow-medium	

HOSTAFORM[®] C 13031

Characteristics

Additives

Release agent


Additional information

Injection molding

Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.


HOSTAFORM® C 13031

Viscosity-shear rate

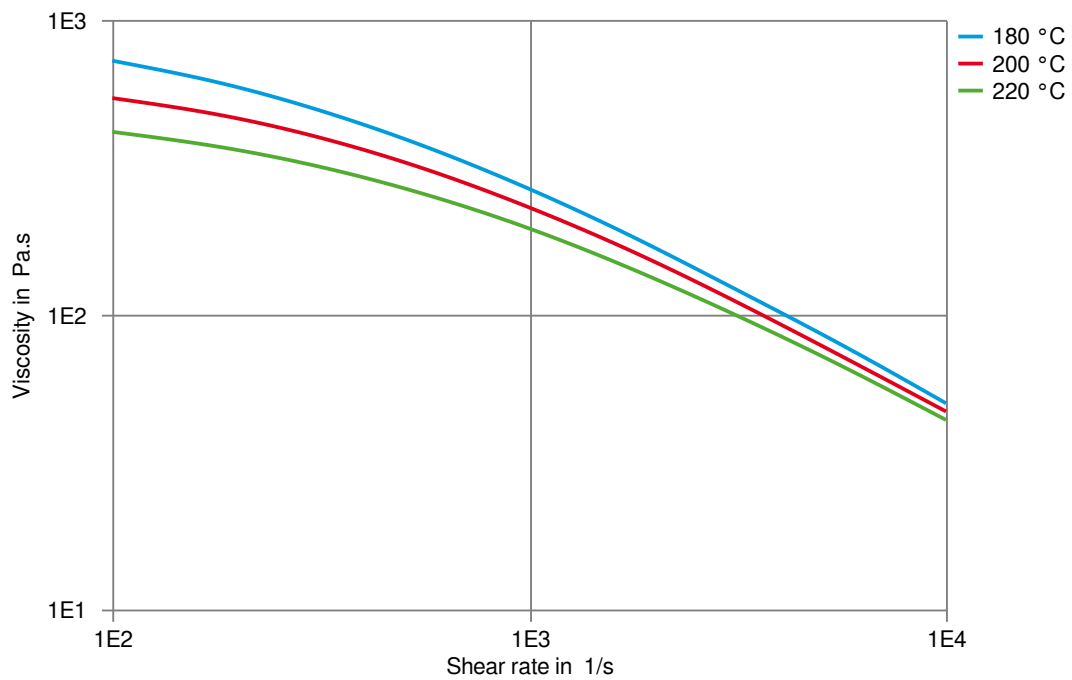


HOSTAFORM® C 13031

Shearstress-shear rate

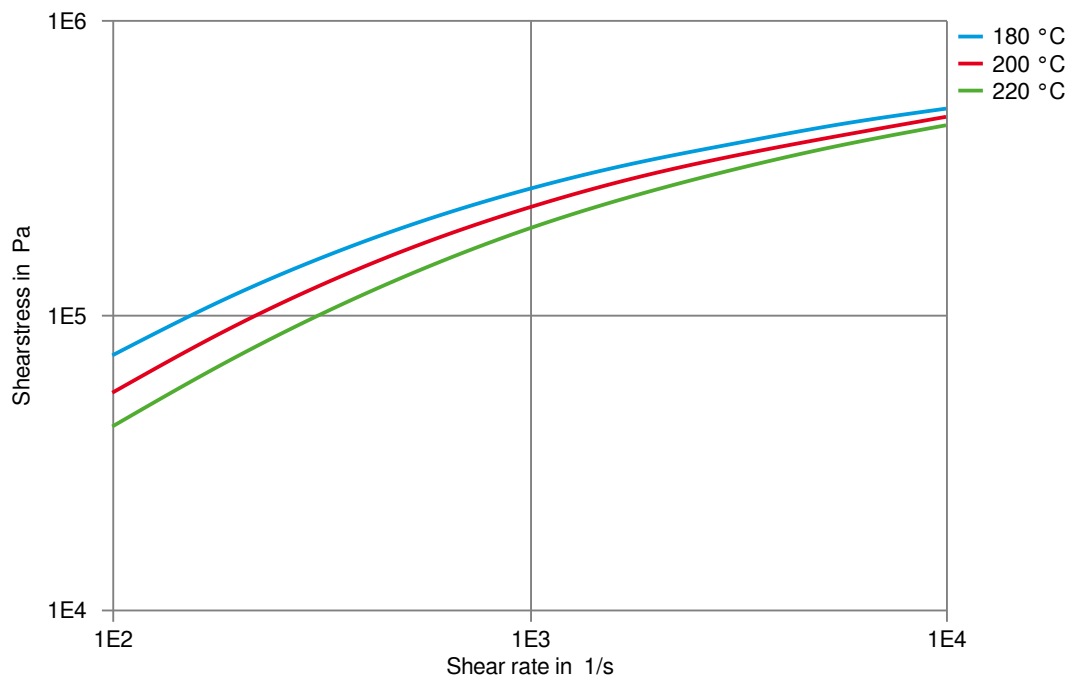


HOSTAFORM® C 13031

Stress-strain

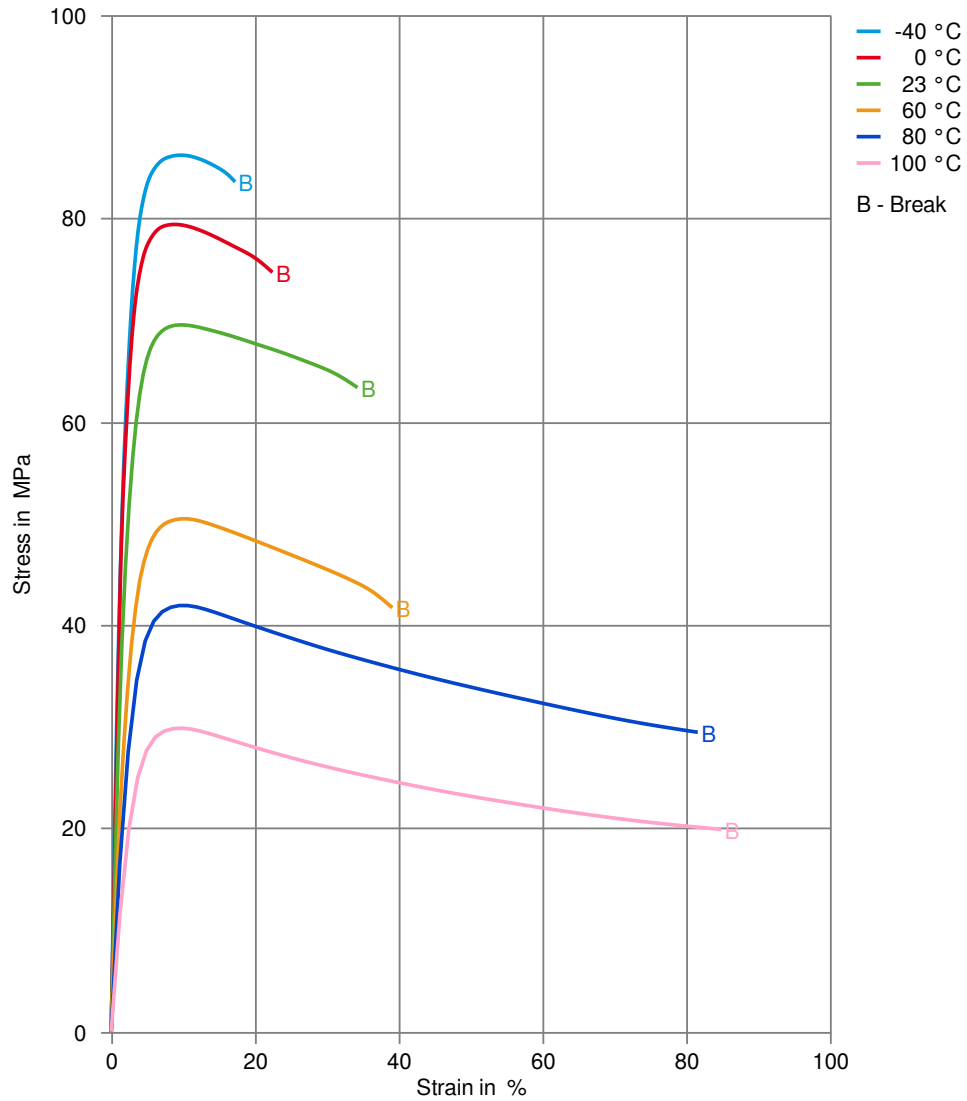


HOSTAFORM® C 13031

Secant modulus-strain

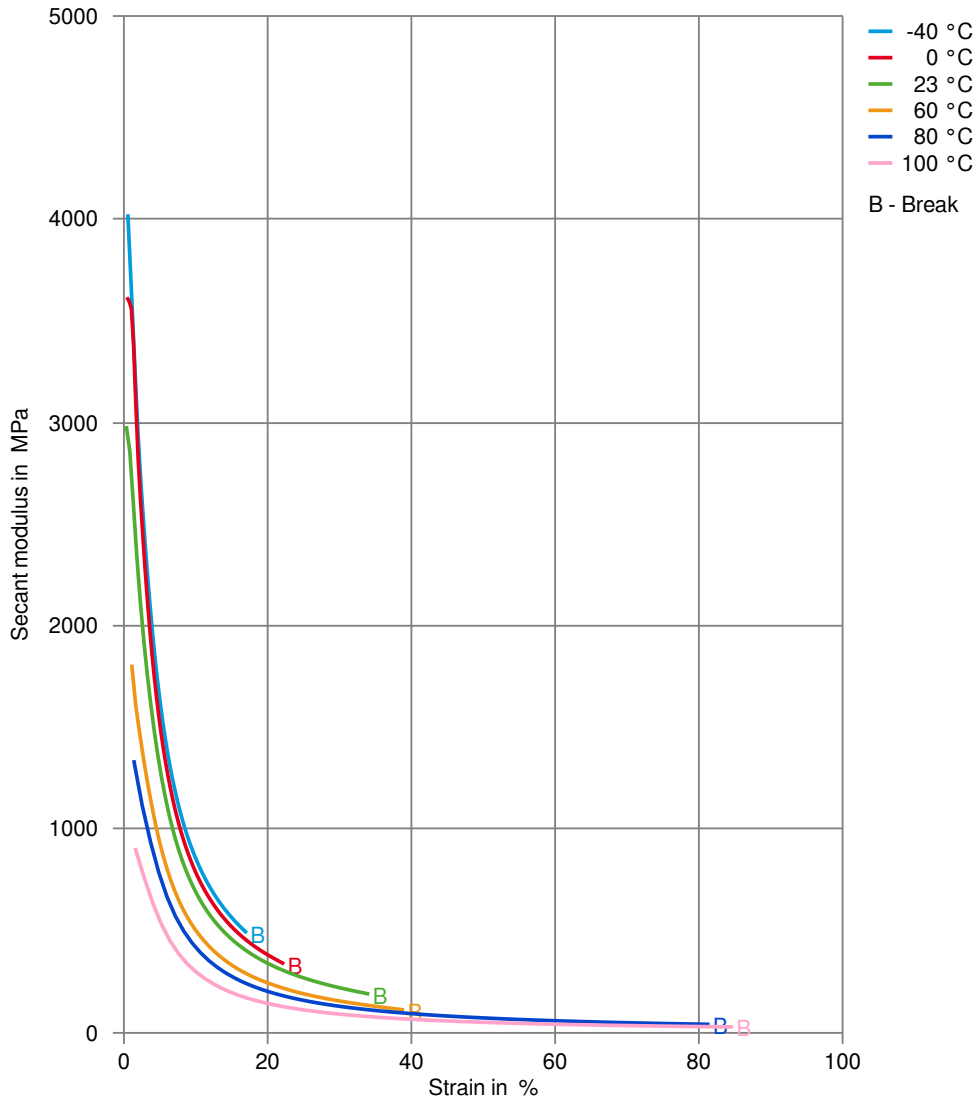

HOSTAFORM® C 13031

True stress-strain

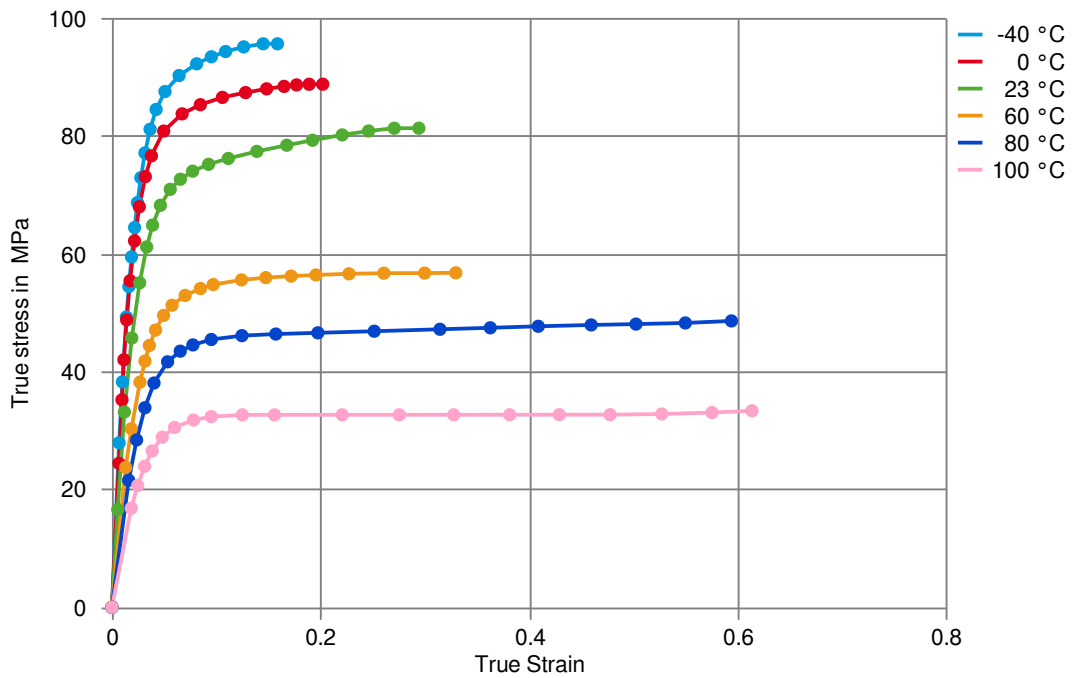

HOSTAFORM[®] C 13031

Processing Texts

Pre-drying	Drying is not normally required. If material has come in contact with moisture through improper storage or handling or through regrind use, drying may be necessary to prevent splay and odor problems.
Longer pre-drying times/storage	The product can then be stored in standard conditions until processed.
Injection molding	Standard injection moulding machines with three phase (15 to 25 D) plasticating screws will fit.
Injection molding Preprocessing	<p>General drying is not necessary due to low moisture absorption of the resin.</p> <p>In case of bad storage conditions (water contact or condensed water) the use of a recirculating air dryer (100 to 120 °C / max. 40 mm layer / 3 to 6 hours) is recommended.</p> <p>Max. Water content 0,2 %</p>
Injection molding Postprocessing	Conditioning e.g. moisturizing is not necessary.

Other Approvals

Other Approvals

OEM	Specification	Additional Information
Bosch	N28 BN22-O025	Natural & Black
Stellantis - Chrysler	CPN 4270	Natural
Continental	TST N 055 54.11	
Continental	TST N 055 54.11	(TST N 055 54.11-001)
Continental	TST N 055 54.30	
Mercedes-Benz Group (Daimler)		Fuel (Natural & Black)
Ford	WSK-M4D635-A2	Natural & Black 12
GM	GMW22P-POM-C3	Natural
Li Auto	Q/LiA5310020	2021 (V2)
Stellantis - PSA Group	FTM69 0008	
Stellantis - PSA Group	01994_14_00057	

HOSTAFORM® C 13031

Renault	UB03f	PMR2020
VW Group	TL 526 36A	
VW Group	TL 526 36C	

NOTICE TO USERS: Values shown are based on testing of laboratory test specimens and represent data that fall within the standard range of properties for natural material. These values alone do not represent a sufficient basis for any part design and are not intended for use in establishing maximum, minimum, or ranges of values for specification purposes. Colourants or other additives may cause significant variations in data values. Properties of moulded parts can be influenced by a wide variety of factors including, but not limited to, material selection, additives, part design, processing conditions and environmental exposure. Other than those products expressly identified as medical grade (including by MT® product designation or otherwise), Celanese's products are not intended for use in medical or dental implants. Regardless of any such product designation, any determination of the suitability of a particular material and part design for any use contemplated by the users and the manner of such use is the sole responsibility of the users, who must assure themselves that the material as subsequently processed meets the needs of their particular product or use. To the best of our knowledge, the information contained in this publication is accurate; however, we do not assume any liability whatsoever for the accuracy and completeness of such information. The information contained in this publication should not be construed as a promise or guarantee of specific properties of our products. It is the sole responsibility of the users to investigate whether any existing patents are infringed by the use of the materials mentioned in this publication. Moreover, there is a need to reduce human exposure to many materials to the lowest practical limits in view of possible adverse effects. To the extent that any hazards may have been mentioned in this publication, we neither suggest nor guarantee that such hazards are the only ones that exist. We recommend that persons intending to rely on any recommendation or to use any equipment, processing technique or material mentioned in this publication should satisfy themselves that they can meet all applicable safety and health standards. We strongly recommend that users seek and adhere to the manufacturer's current instructions for handling each material they use, and entrust the handling of such material to adequately trained personnel only. Please call the telephone numbers listed for additional technical information. Call Customer Services for the appropriate Materials Safety Data Sheets (MSDS) before attempting to process our products.

© 2023 Celanese or its affiliates. All rights reserved. Celanese®, registered C-ball design and all other trademarks identified herein with ®, TM, SM, unless otherwise noted, are trademarks of Celanese or its affiliates. Fortron is a registered trademark of Fortron Industries LLC. KEPITAL is a registered trademark of Korea Engineering Plastics Company, Ltd.